

3. Take off the the 3M® sealing and apply the Nose Protector on your board starting from the top. Place the board protector as far as possible on the top to ensure maximum protection. After placement press firmly to achieve good adhesive contact and bond strength. Pay special attention to the edges of the Nose Protector.



4. After application it is important to continuously apply pressure. At room temperature approximately 50% of ultimate bond strength will be achieved after 20 minutes and 100% after 72 hours. If the Nose Protector comes off due to improper application it is possible to (re)fix the Nose Protector with a Contact Adhesive Gel.




*UNIFIBER 3M® SELF
ADHESIVE NOSE
PROTECTOR
Instruction manual*




WHY USE A UNIFIBER 3M® SELF ADHESIVE NOSE PROTECTOR:

- The double density Nose Protector protects your board against catapults and impacts from your mast!
- It features lowered corners so your sail can easily move across the nose when waterstarting.
- Available in the sizes: S,M, L and XL for the best fit for any board.

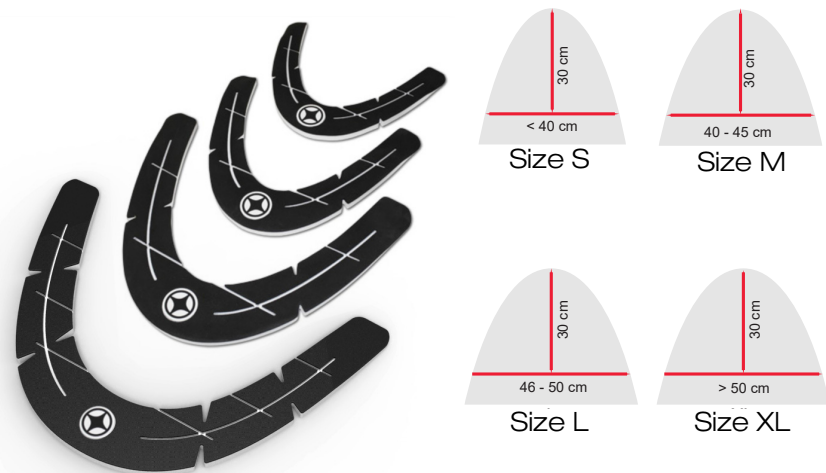

1. Remove all dirt and dust from the nose of the board and clean with a degreaser. Make sure the board is totally dry before moving on to the next step.

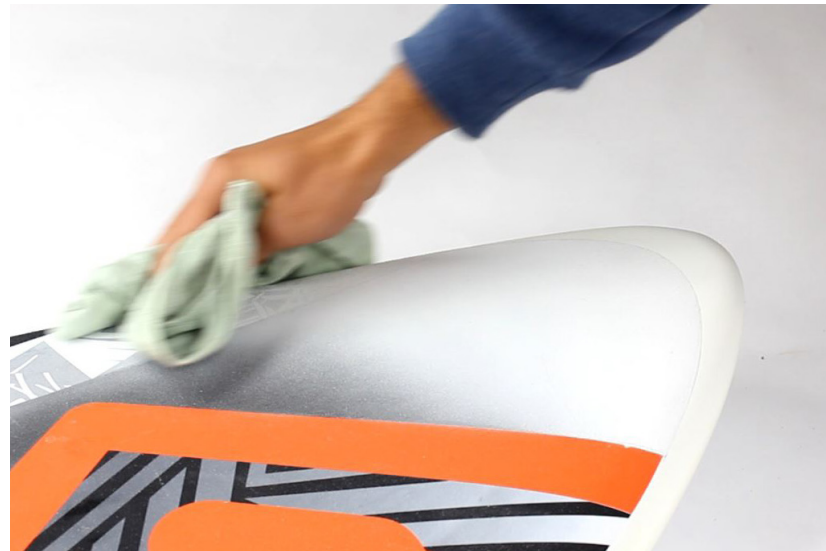

2. The shape of the Unifiber 3M® Self Adhesive Nose Protector can be adjusted slightly due to its unique design to fit most board shapes.

